

# NEW MICHELIN ANAKEE III

## ADVENTURE TOURING

All-new adventure touring tire

### Performance that lasts mile after mile

- ▶ New silica tread compound yields even more mileage compared to MICHELIN® Anakee® 2 tires
- ▶ Innovative tread pattern inhibits irregular wear patterns, while evacuating water, dirt and mud

### Enhanced ride qualities

- ▶ Tire architecture engineered for easy maneuverability and precise handling
- ▶ Excellent stability and rider feedback, thanks to a new high-rigidity casing


### Excellent wet traction

- ▶ Innovative silica tread compounds offer the best balance between grip and durability
- ▶ Distinctive tread pattern pulls water away from the contact patch



Transverse grooves efficiently evacuate water, for dependable wet-weather grip.

Beveled lateral grooves help shed mud and gravel when riding off-road.

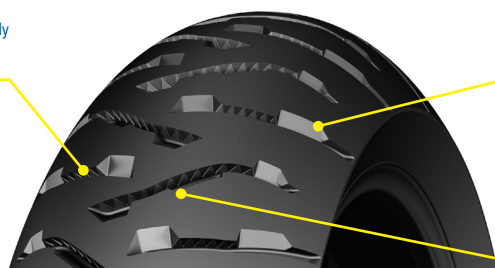

Indented tread grooves help provide consistent lateral grip even as the tire wears.

Size	Load index & Speed rating	Michelin Tube	Overall width		Overall diameter		Max load <sup>1</sup>	Tread depth <sup>2</sup>	Preferred rim width (compatible rims)						
			Static mm	In Use in	Static mm	In Use in				kg	lbs	mm	32nds	in	
<b>ANAKEE® III FRONT BIAS</b>															
90/90-21	54 S	TL or 21MDR	90	3.54	99	3.90	695	27.36	713	28.07	212	467	5	6	2.15 (1.85 to 2.50)
90/90-21	54 H	TL or 21MDR	90	3.54	99	3.90	695	27.36	713	28.07	212	467	5	6	2.15 (1.85 to 2.50)
90/90-21	54 V	TL or 21MDR	90	3.54	99	3.90	695	27.36	713	28.07	212	467	5	6	2.15 (1.85 to 2.50)
100/90-19	57 H	TL or 19MF	101	3.98	111	4.37	663	26.10	685	26.97	230	507	5	6	2.50 (2.15 to 2.75)
<b>ANAKEE® III REAR BIAS</b>															
120/90-17	64 S	17MH	119	4.69	131	5.16	648	25.51	664	26.14	280	617	7	9	2.75 (2.15 to 3.00)
<b>ANAKEE® III FRONT RADIAL</b>															
110/80R19	59 H	TL or 19MF	109	4.29	120	4.72	659	25.94	681	26.81	243	536	5	6	2.50
110/80R19	59 V	TL or 19MF	109	4.29	120	4.72	659	25.94	681	26.81	243	536	5	6	2.50
<b>ANAKEE® III REAR RADIAL</b>															
130/80R17	65 S	TL or 17MH	129	5.08	142	5.59	640	25.20	654	25.75	290	639	8	10	3.00
130/80R17	65 H	TL or 17MH	129	5.08	142	5.59	640	25.20	654	25.75	290	639	8	10	3.00
140/80R17	69 H	TL or 17MI	142	5.59	156	6.14	656	25.83	682	26.85	325	717	8	10	3.50
150/70R17	69 H	TL or 17MI	149	5.87	164	6.46	642	25.28	656	25.83	325	717	8	10	4.25
150/70R17	69 V	TL or 17MI	149	5.87	164	6.46	642	25.28	656	25.83	325	717	8	10	4.25

<sup>1</sup>Refer to the motorcycle owner's manual for the vehicle's load capacity. Michelin recommends the tire pressures quoted by the vehicle manufacturer.

<sup>2</sup>Tread depth measurements rounded to nearest whole number.